

No battery room should be without this essential maintenance tool.



Simply connect the Watering Gun to a standard water hose or a Deionizer, put the tip of the gun into the cell and squeeze the ergonomic trigger. The mechanism will automatically shut off at exactly the right electrolyte level. The reliable PS Watering Gun speeds up battery watering, improves filling accuracy, and improves operator safety.

It's no wonder that it has been America's most popular battery maintenance tool for over two decades. Philadelphia Scientific Watering Guns are great for applications where there are five or fewer batteries. For larger applications, the Stealth™ Watering System or the Water Injector System™ should be considered.


All automatic shutoff models have the following features:

**Automatic shutoff** – The Watering Gun fills cells to precisely the correct level. The shutoff is so positive you can actually feel it.

**Safe** – It keeps eyes and face away from battery hazards, and reduces backache from bending over batteries. It is insulated to prevent sparking on connectors.

**Reliable** – The patented shutoff mechanism has been tested to 1 million cycles and proven in hundreds of thousands of tough applications worldwide. Powered by the water itself, it has no solenoids, no electronics and no wiring.



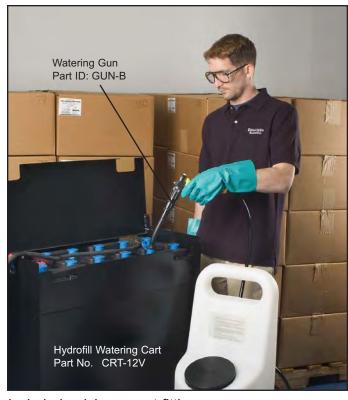

included quick connect fittings.

Fast but gentle – The flow rate is about 2 gallons/minute (8 l/m) which is fast enough for the largest cells. Yet the flow is gentle enough to fill a coffee mug.

**No installation cost** – Attach the Gun to any standard hose (or our Deionizer System) and you have a fully operating battery filling system. A built-in regulator automatically reduces high water pressure so no adjustments are ever needed. The minimum water pressure required is 15 psi (1.0 bar).

Automatic shutoff & pressure regulator

**High flow rate** – 2 gallon/minute (8 liters/min)

**Immediate installation** – Attaches to any standard hose with