

Announcing a New Name and a New Additionto the Smart Blinky™ Family!

Starting April 1, 2010 our *newest battery watering monitor*, the **Smart Blinky™**, will be available for order and will join its companion battery watering monitors, the Smart Blinky Remote and the Blinky.



The Smart Blinky™
(ACC-SWM)

Blinks Green when electrolyte level is OK



Blinks Red when water is needed

The new Smart Blinky has the following features:

- One piece design - The indicator LED is located above the probe.
- Red/Green Indication - Blinking Green LED means the electrolyte level is good. Blinking Red LED means water is needed.
- Intuitive installation - The power wires are different lengths to make installation easier and to reduce errors.
- Brighter Indicator LED - Makes it easier to see.
- Improved Probe Design - The probe is even easier to trim in the field if needed. As with all Philadelphia Scientific battery watering monitors the probe is lead so there is never a fear of poisoning the cell it is placed into.
- Patented Smart Sensing Technology - The Smart Blinky is programmed to confirm that the electrolyte level is below the probe tip before it changes color from Green to Red. This eliminates false indication and maximizes watering intervals to prevent unnecessary watering.
- UL Classified - As with all Philadelphia Scientific battery watering monitors, our new Smart Blinky is UL Classified so that you can be assured of its safety.

In order to differentiate the new Smart Blinky battery watering monitor from our existing Smart Blinky, the original Smart Blinky has been renamed and is now called the **Smart Blinky Remote™** battery watering monitor to better reflect its functionality.



The Smart Blinky Remote™
(ACC-SREM)



The new Smart Blinky is available in all of the factory pre-cut lengths of the Smart Blinky Remote and the Blinky battery watering monitors:


Smart Blinky Remote™	Smart Blinky™	Blinky™	Monitor Probe Length	
			Inches	Millimeters
ACC-SREM	ACC-SWM	ACC-BWM	2.35"	59.6 mm
ACC-SREMC1	ACC-SWMC1	ACC-BWMC1	2.00"	50.8 mm
ACC-SREMC2	ACC-SWMC2	ACC-BWMC2	1.73"	43.9 mm
ACC-SREMC3	ACC-SWMC3	ACC-BWMC3	4.00"	101.6 mm
ACC-SREMC4	ACC-SWMC4	ACC-BWMC4	3.00"	76.2 mm
ACC-SREMC5	ACC-SWMC5	ACC-BWMC5	4.50"	114.3 mm
ACC-SREMC6	ACC-SWMC6	ACC-BWMC6	5.00"	127.0 mm
ACC-SREMC7	ACC-SWMC7	ACC-BWMC7	3.25"	82.6 mm

Please note: The 2.35" probe length is our standard length for all of our battery watering monitors and fits the majority of cells. It can always be easily trimmed for a custom fit if is too long.

The Smart Blinky is ideal for batteries where the top of the battery can be seen and where Red/Green indication is needed. The new Smart Blinky fills the gap between our other two existing watering monitors both in features and in price.



Smart Blinky (ACC-SWM)

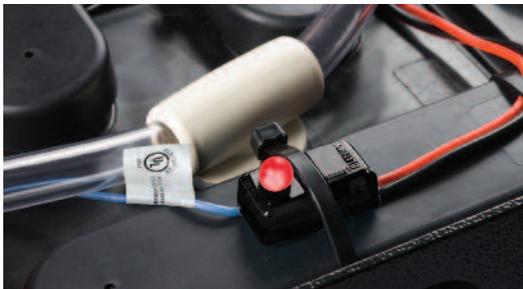

Smart Blinky Remote (ACC-SREM)

The Smart Blinky Remote is ideal for batteries that do not leave the truck or for batteries that are charged on multi-level racks where the indicator LED can be edge mounted for high visibility.

The Blinky battery watering monitor is our basic model with green only indication.



Blinky (ACC-BWM)

Let us help you select the correct battery watering monitor to accompany one of our single point watering systems or watering guns.



Philadelphia Scientific LLC 207 Progress Drive Montgomeryville, PA 18936
P: 215.616.0390 F: 215.616.0500 www.phlsci.com

© 2010 Philadelphia Scientific LLC. All Rights Reserved. Philadelphia Scientific and the PS logo are registered trademarks of Philadelphia Scientific LLC. Blinky, Smart Blinky and Smart Blinky Remote are trademarks of Philadelphia Scientific LLC. UL is a registered trademark of Underwriters Laboratories. E&O.E.